


DN 80–400 Standard construction

- Valve operated by: handwheel
cylinder
electrical actuator
- Material acc. to: cost steel
SS ANSI 316
- Flange drilling: see table EN 1092 / ISO 7005
- Nominal pressure: see table

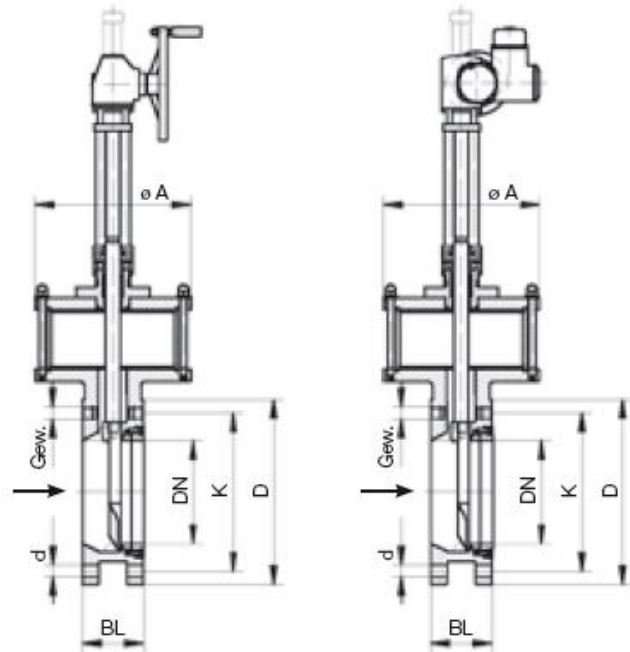

DN	PN	D	K	Screws	Ø	d	BL	A
80	25/40	200	160	8 pcs.	M16	18	100	205
	64	215	170	8 pcs.	M20	22		
	100/160	230	180	8 pcs.	M24	26		
100	25/40	235	190	8 pcs.	M20	22	100	205
	64	250	200	8 pcs.	M24	26		
	100/160	265	210	8 pcs.	M27	30		
125	25/40	270	220	8 pcs.	M24	26	100	255
	64	295	240	8 pcs.	M27	30		
	100/160	315	250	8 pcs.	M30	33		
150	25/40	300	250	8 pcs.	M24	26	110	300
	64	345	280	8 pcs.	M30	33		
	100/160	355	290	12 pcs.	M30	33		
200	25	360	310	12 pcs.	M24	26	140	340
	40	375	320	12 pcs.	M27	30		
	64	415	345	12 pcs.	M33	36		
	100/160	430	360	12 pcs.	M33	36		
250	25	425	370	12 pcs.	M27	30	150	380
	40	450	385	12 pcs.	M30	33		
	64	470	400	12 pcs.	M33	36		
	100	505	430	12 pcs.	M36	39		
300	25	485	430	16 pcs.	M27	30	160	420
	40	515	450	16 pcs.	M30	33		
	64	530	460	16 pcs.	M33	36		
	100/160	585	500	16 pcs.	M39	42		

DN	PN	D	K	Screws	Ø	d	BL	A
350	25	555	490	16 pcs.	M30	33	210	560
	40	580	510	16 pcs.	M33	36		
	64	600	525	16 pcs.	M36	39		
	100	655	560	16 pcs.	M45	48		
400	25	620	550	16 pcs.	M33	36	250	620
	40	660	585	16 pcs.	M36	39		
	64	670	585	16 pcs.	M39	42		
	100	715	620	16 pcs.	M45	48		