


Standard construction

- Body: Ductile iron EN-GJS-400-15
- Disc: Ductile iron EN-GJS-400-15
- Corrosion protection: Body and Disc in/outside with EKB Epoxy powder coating
- Shaft: 1.4057, 17% Alloy Steel
- Bearing: zincless Bronze, self-lubricating
- Seal: EPDM
- Nominal pressure: DN 150 – DN 400 max. 10 bar
DN 150 – DN 400 max. 16 bar
- Flange drilling PN 10/16 EN 1092 / ISO 7005
- Face-to-face EN 558 / ISO 5752 part 14
- Test acc. EN 12266-1, rate A

Standard construction: Lever mounting in flow direction RIGHT!

Option: Bracket for pump control

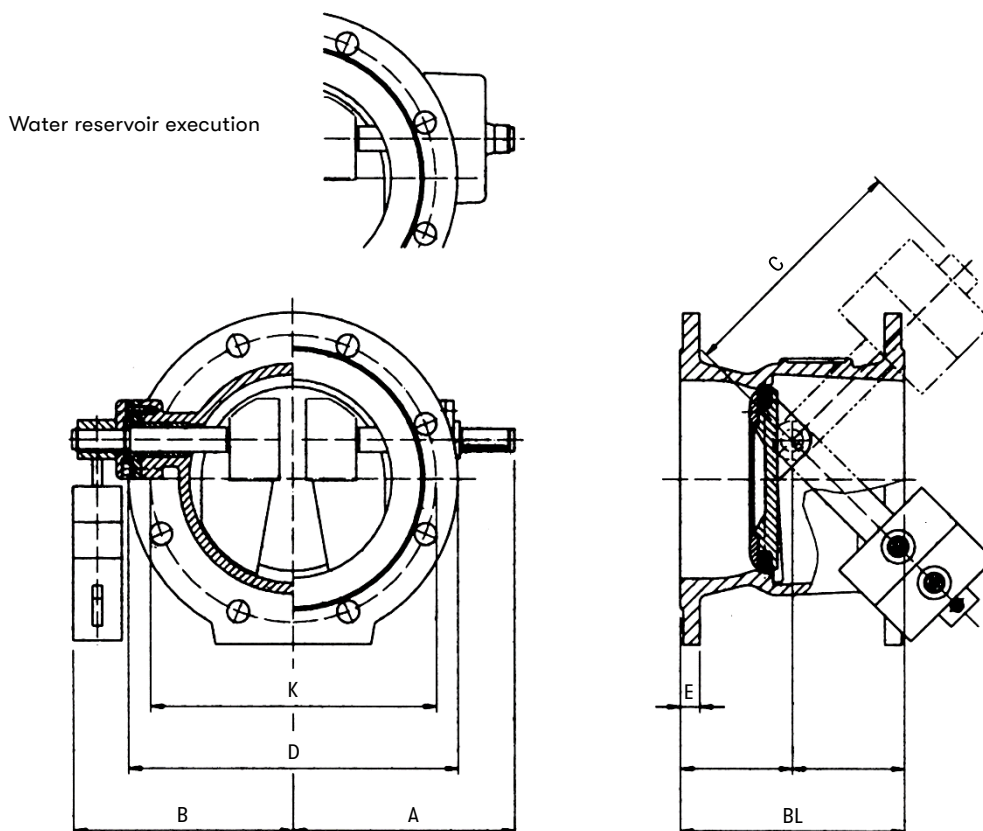

Working pressure max. 10 bar, Flange drilling EN 1092 PN 10

| DN | D | K | BL | A | B | C | E | Screws |
|-----|-----|-----|-----|-----|-----|-----|----|----------|
| 150 | 285 | 240 | 210 | 218 | 217 | 250 | 19 | 8 x M20 |
| 200 | 340 | 295 | 230 | 228 | 227 | 250 | 20 | 8 x M20 |
| 250 | 400 | 350 | 250 | 259 | 259 | 300 | 22 | 12 x M20 |
| 300 | 455 | 400 | 270 | 308 | 317 | 378 | 25 | 12 x M20 |
| 350 | 505 | 460 | 290 | 362 | 367 | 395 | 25 | 16 x M20 |
| 400 | 565 | 515 | 310 | 393 | 398 | 490 | 25 | 16 x M24 |

Working pressure max. 16 bar, Flange drilling EN 1092 PN 16

| DN | D | K | BL | A | B | C | E | Screws |
|-----|-----|-----|-----|-----|-----|-----|----|----------|
| 150 | 285 | 240 | 210 | 218 | 217 | 250 | 19 | 8 x M20 |
| 200 | 340 | 295 | 230 | 228 | 227 | 250 | 20 | 12 x M20 |
| 250 | 400 | 355 | 250 | 259 | 259 | 300 | 22 | 12 x M24 |
| 300 | 455 | 410 | 270 | 308 | 308 | 378 | 25 | 12 x M24 |
| 350 | 520 | 470 | 290 | 362 | 362 | 395 | 27 | 16 x M24 |
| 400 | 580 | 525 | 310 | 393 | 398 | 490 | 28 | 16 x M27 |