


WEY BUTTERFLY VALVES TL20 WITH HAND LEVER

Dimensions

9.2.20

Hand lever type MN

- Handle: Non-slip soft plastic red
- Lever arm: Epoxy coated carbon steel black
- Lever head: Epoxy coated aluminium black
- Locking plate: Glass fibre reinforced polyamide
- Lockable every 15°

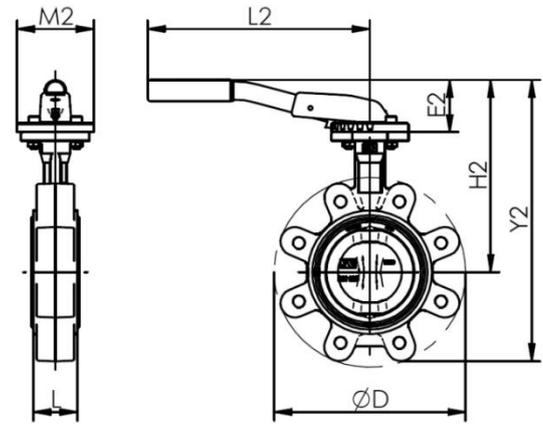


Lockable lever type MN

DN [mm]	D	L	E2	H2	Y2	L2	M2	Kg
25	1"	130	33	49	151.5	202	90	2.6
32	1¼"	130	33	49	151.5	202	90	2.6
40	1½"	140	33	49	159	213	90	2.7
50	2"	156	43	49	169	228	90	3.6
65	2½"	175	46	49	184	250	90	4
80	3"	194	46	60	201	260	90	5.6
100	4"	224	52	60	225	330	90	7.1
125	5"	267	56	75	255	315	90	10.7
150	6"	292	56	75	268	404.5	90	11.5
200	8"	334	60	75	300	315	90	14.3

Hand lever type MR

- Handle: Non-slip soft plastic red
- Lever arm: Epoxy coated carbon steel black
- Lever head: Epoxy coated aluminium black
- Locking plate: Aluminium
- Locking lever: Stainless steel AISI 420
- Lever freely positionable and lockable

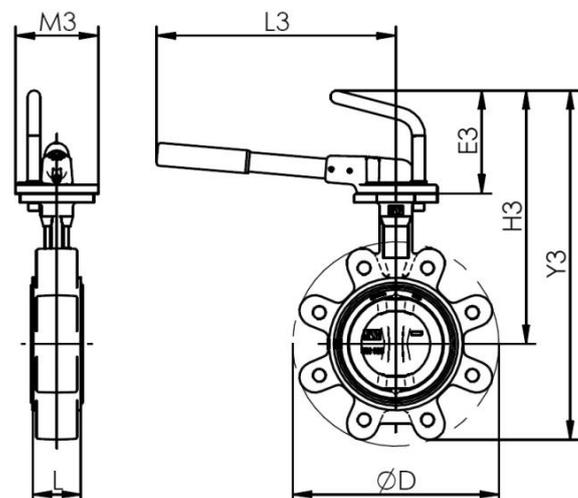

Freely positionable and lockable lever type MR

DN [mm]		D	L	E3	H3	Y3	L3	M3	Kg
25	1"	130	33	113	215.5	266	260	90	2.5
32	1¼"	130	33	113	215.5	266	260	90	2.5
40	1½"	140	33	113	223	277	260	90	2.6
50	2"	155	43	113	233	292	260	90	3.5
65	2½"	175	46	113	248	314	260	90	3.9
80	3"	194	46	113	254	345	260	90	5.4
100	4"	224	52	113	278	383	260	90	6.9
125	5"	267	56	113	293	418	310	90	10.5
150	6"	292	56	113	306	442	310	90	11.3
200	8"	334	60	113	338	493	310	90	14.1
250	10"	409	68	120	403	613	500	130	28.2
300	12"	480	78	120	428	668	500	130	41.3