


WEY BUTTERFLY VALVES TW20 WITH HAND LEVER

Dimensions

9.1.20

Hand lever type MN

- Handle: Non-slip soft plastic red
- Lever arm: Epoxy coated carbon steel black
- Lever head: Epoxy coated aluminium black
- Locking plate: Glass fibre reinforced polyamide
- Lockable every 15°

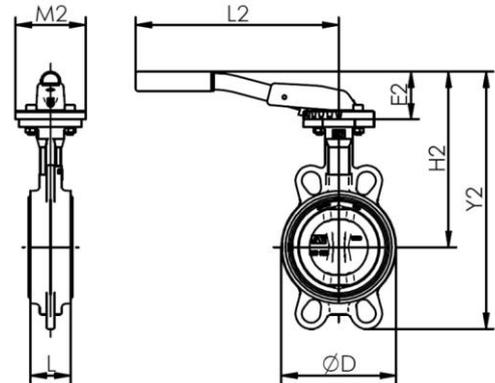


Lockable lever type MN

DN [mm]	D	L	E2	H2	Y2	L2	M2	Kg
25	1"	68	33	49	151.5	212	220	2.2
32	1¼"	68	33	49	151.5	212	220	2.2
40	1½"	76	33	49	159	215	220	2.3
50	2"	100	43	49	169	230.5	220	3.1
65	2½"	108	46	49	184	253	220	3.4
80	3"	124	46	60	201	295	260	4
100	4"	147	52	60	225	331	260	4.8
125	5"	180	56	75	255	381	315	7.1
150	6"	206	56	75	268	401	315	8.2
200	8"	257	60	75	300	470	315	11.9

Hand lever type MR

- Handle: Non-slip soft plastic red
- Lever arm: Epoxy coated carbon steel black
- Lever head: Epoxy coated aluminium black
- Locking plate: Aluminium
- Locking lever: Stainless steel AISI 420
- Lever freely positionable and lockable

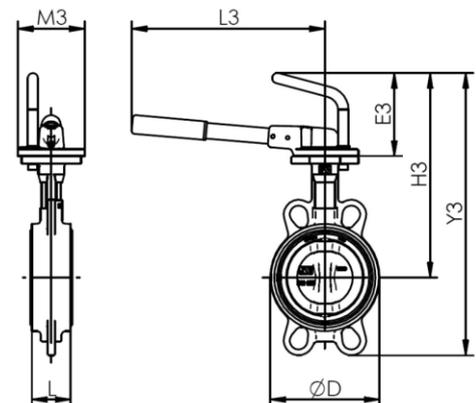

Freely positionable and lockable lever type MR

DN [mm]		D	L	E3	H3	Y3	L3	M3	Kg
25	1"	68	33	113	215.5	276	260	90	2.1
32	1¼"	68	33	113	215.5	276	260	90	2.1
40	1½"	76	33	113	223	279	260	90	2.2
50	2"	100	43	113	233	294	260	90	3
65	2½"	108	46	113	248	317	260	90	3.3
80	3"	124	46	113	254	348	260	90	3.8
100	4"	147	52	113	278	384	260	90	4.6
125	5"	180	56	113	293	419	310	90	6.9
150	6"	206	56	113	306	439	310	90	8
200	8"	257	60	113	338	508	310	90	11.7
250	10"	314	68	120	403	613	500	130	21.5
300	12"	376	78	120	428	668	500	130	31.3