


DN 150–200 Standard construction

- Actuator: Cylinder
- Flange drilling: DN 150 150/150 4 x M12
DN 200 180/180 4 x M12
- Nominal pressure PN: DN 150 4 bar
DN 200 2.5 bar
- Operating pressure: DN 150 4 bar
DN 200 2.5 bar
- Supply pressure: 6–8 bar
- Face to Face: EN 558 / ISO 5752 Series 20 (DIN 3202 K1)
- Test acc.: EN 12266-1, rate A
- Materials acc. to: Data sheet 2.0.13
- Feature: Bi-directional bubble tight shut-off

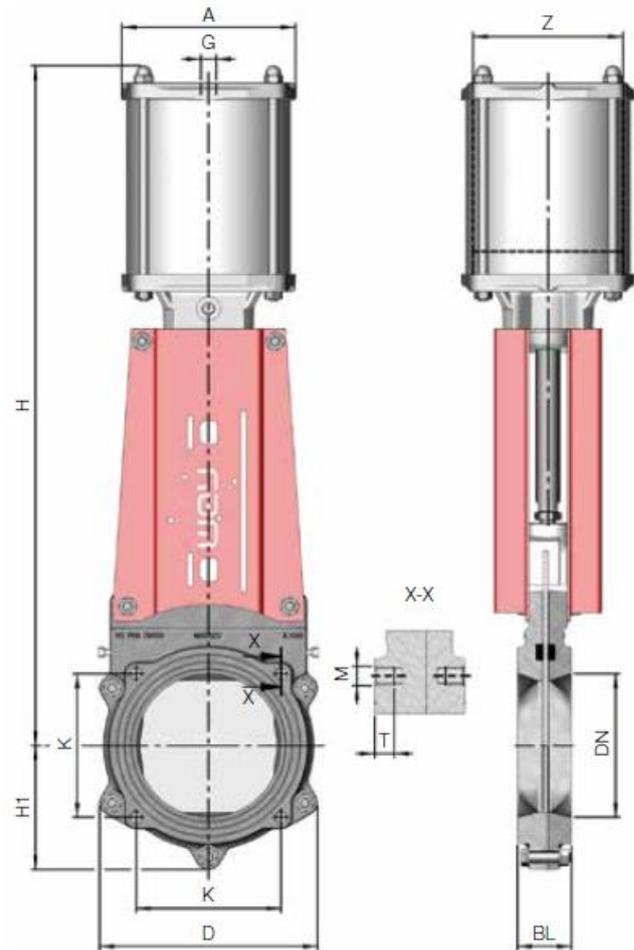

DN	BL	D	K	M	T	Bolts	H	H1	A	Z	G ISO 228	Weight
150	56	226	150	M12	12	4 pcs.	698	130	180	160	G ¼"	27 kg
200	60	308	180	M12	12	4 pcs.	828	156	180	160	G ¼"	37 kg